C H R I S T I N A G R I F F I N A R C H I T E C T PC 1 0 Spring Street, Hastings-on-Hudson, New York 10706

July 10, 2019

Members of the Hastings Zoning Board of Appeals Village of Hastings-on-Hudson 7 Maple Avenue, Hastings-on-Hudson, NY 10706

Re: Alterations and Addition to the Kozicky Residence 25 Devon Way, Hastings-on-Hudson, NY

To the Members of the Zoning Board of Appeals:

As the Architect for the proposed renovations to the Kozicky Residence, I made the following changes to the original submission in response to your comments.

- 1. Eliminated the encroachment to the front yard setback by setting the the garage/ deck addition out further towards the backyard.
- 2. Reduced the driveway slope to meet the existing code requirement of 15%.

I am requesting that the Zoning Board of Appeals grant the following variance from the Hastings Zoning Code:

1. Variance from Section 295-40. a2- Max. driveway entrance grade

We are requesting a variance for a driveway entrance grade of 14%. The allowable grade is 3% within 30 FT of the center line of the driveway.

I appreciate your understanding of our request for this variance, and look forward to presenting the drawings at the next Zoning Board of Appeals meeting. Thank you for your time and effort for review of our proposal.

Sincerely,

Christina Griffin AIA LEED AP CPHC

DERRY LANE 2 StorY Brick Stucco & Brick Stucco & Brick Residence John 95,112 DEVON WAY -209.05 - Edge of Aprior 209.98 210.81 STREE C 203.90 × 204.71 205.20× * 203.35 × 205.50 * 202.28 × 205.47 Frome Residence

Only copies from the original of this topography map marked with an original of the Land Surveyors embossed seal shall be considered to be true, valid copies.

zed alteration or addition to a map bearing a licensed Land seal is a violation of Section 7209, Subdivision 2 of the New York sation 1 as:

tion only where indicated.

ulgacent property lines and easements not surveyed or certified. Access to adjacent rights of way, easements and public or private on guaranteed or certified.

ologyound utilities shown hereon are approximate and shor rifed before excavating dditional undergenund utilities are not shown or certified erroachments and stractures before grade, if any, not show

This map is prepared to show topography only and is not to be used for title transfer purposes. Map may not be certified to title companies andlor banks

veniuse hereon being Loss 72 and 73 as shown on a centain kevised Map No.1 of Shado-Lavn, Hastings-on-Hudson, P. veloped by The Homedond Co.² in lang field in the Westchester Canny Clerk's Office, Phil econds October 11, 1926 as map number 3056.

Premises shown hereon designated on the Village of H Tax Maps ar: Section 4.110, Biock 99, Lot 8.

TOPOGRAPHY OF PROPERTY
PREPARED FOR
MARK KOZICKY
AND
DIANA KOZICKY
STILATE NO STILATE NO STULENGS OF HISTORICA SON OF DEBENDARIANDEN IN WEST CHART OF HISTORICA SON OF THE STULENGS OF THE STU

SCALE: I" = I0 GRAPHIC SCALE

Field Survey By: BC/CR Checked By: DM

Project: 19-142 Drawn By: DA

TC MERRITTS LAND SURVEYORS

394 BEDFORD ROAD • PLEASANTVILLE • NY 10570
(914) 769-8003 • (203) 622-8899 **Min**

Surveyed, May 10, 2019
May Prequent, May 14, 2019
Br. Jappin T. M. M. T. A.
New York Sure Lecencel Land Surveyor No. 15004

COPPRICHT (© 2019

TC MERRITTS LAND SURVEYORS
ALL NORTHS RESEWENT UNAUTHORISED DUPLES THOSE
ELECTRONIC THE ASSESSION WITHOUT PROOF EXPRISION
15.4 FOOL ATTON OF A POPE CARE E. ARS.

KOZICKY RESIDENCE

25 DEVON WAY, HASTINGS-ON-HUDSON, NY 10706

CHRISTINAGRIFFINARCHITECTPC

10 Spring Street, Hastings-on-Hudson, NY 10706



GENERAL NOTES

- 1. These documents remain the exclusive property of the Architect, and may not be used for any purpose 12. All indicated Survey material is for general whatsoever without written consent of the Architect.
- 2. All construction shall comply fully with the 2015 International Residential Code 2015 International Energy Conservation Code, 2017 NYS Supplement, 13. Contractors shall be responsible for protection of all local building code, fire department regulations, and all other agencies having jurisdiction over project.
- 3. Approved stamped set of building plans must be present on site for all inspections.
- 4. A current Westchester County licensed and insured contractor must be on file with current building permit untill Certificate of Occupancy is issued. If contractor of record has been removed from the project, a stop work order will be issued untill a new Westchester County licensed and insured contractor is retained.
- 5. General Contractor shall carry property damage insurance, public liability insurance, workman's compensation, auto insurance, and general liability 15. General contractor shall be responsible for the as required by Federal, State, and Local Codes and as Owner requires.
- 6. Licensed electrician to file separate electrical
- 7. Licensed plumber to file separate plumbing permit 8. All health, safety, fire, zoning and environmental regulations shall be adhered to at all times by the

Owner and/or occupant.

for construction.

- 9. The contractor shall become familiar with conditions of the site, and the work as shown on the construction documents, prior to submitting a bid
- 10. Contractors shall coordinate all work procedures and working hours with local authorities, neighborhood associations, and any other
- governing authorities. 11. The contractor shall be responsible for providing al labor and materials to complete the project, in accordance with the construction documents,

- reference only. The Architect assumes no any of the indicated material
- existing and new conditions and materials with and adjacent to the construction area. Any damage caused by the execution of the work indicated or implied herein shall be repaired or replaced to the Owner's satisfaction.
- 14. All construction sites shall conform to the 2010 New York State Property Maintenance Code. All rubbish garbage and construction debris shall be disposed of in an onsite dumpster or removed off site immediately. Materials shall be stacked in orderly fashion as to not create a blight on the community. The village right of way must be kept clear and maintained at all times.
- removal of construction debris, rubbish and offsite disposal in a responsible manner.
- 16. The contractor shall obtain all inspections, approvals and permits, and pay all necessary permit fees required by the local building department and all other agencies having jurisdiction over the project, such as plumbing, electrical & HVAC, except for the building permit, which shall be obtained by the Architect. The contractor shall obtain the certificate of occupancy for the project when construction is complete.
- 17. Contractor shall keep work site free from debris and accumulated refuse, and shall have sole responsibility for protecting all dangerous areas from entry by unauthorized parties.
- 18. Drawings may be rough scaled for estimating and general purposes, but are not to be scaled for construction locations, dimensions, or any other purposes. Dimensions shown shall govern over measurements scaled from plans. Wall dimensions

- are given to finished surfaces. Contractor to consult all portions of the work. with the Architect for questions regarding final dimensions and locations.
- responsibility for the accuracy or the correctness of 19. All dimensions and conditions shown and assumed on the drawings must be verified at the site by contractor before ordering any material or doing
 - 20.Contractor is to design and install adequate and code approved shoring and bracing where needed to safely complete structural work. Contractor to assume full and sole responsibility for structural adequacy of the shoring and for any injuries, damages, cracks, or defects caused by shoring or bracing, and shall repair all such damage at his
 - 21. The Architect is not responsible for workmanship, construction methods, or any omissions or derivations from the drawings during construction.
 - 22.Materials and products indicated on drawings shall be installed in accordance with manufacturer's requirements.
 - 23. The drawings and notes are intended to be complete. Should anything be omitted from the drawings necessary to the proper construction of the work herein described, it shall be the duty of the contractor to notify the Architect. The builder shall visit the site and inform the Architect of any discrepancies of field conditions that may interfere with the total completion of all work included within the contract and verify all conditions prior to the ordering of materials and the start of construction.
 - 24.Minor details not usually shown or specified, but necessary for proper and acceptable construction, installation or operation of any part of the work shall be included in the work the same as specified or
 - 25. The contractor shall supervise and direct the work using his best skill and attention, he shall be solely responsible for all construction means, methods, sequences and procedures and for coordination of

- 26. The use of the words "provide" or "provided" in connection with any item specified is intended to mean that such item be furnished and installed and connected where required.
- 27. Contractor shall maintain a sealed enclosure between work area and other areas of the residence. In addition, the contractor shall be responsible to (a) protect all interior spaces from the area of renovation, and (b) broom sweep all areas at end of each work day.
- 28. The contractor shall do all the cutting, fitting & patching that may be required to make several parts of the work come together properly, and to fit his work, and/or receive, or be received by the work of others, as shown, or as reasonably implied on the drawings
- 29. New and existing work shall come together in a seamless fashion. All new or modified surfaces shall be finished including, but not limited to taping, spackling and priming.
- 30. All insulation to comply with the Energy Efficiency Certificate required by 401.3 2010 Energy Conservation Construction Code of New York, prepared by the Architect.
- 31.If blown or sprayed insulation used, Installer of insulation to submit insulation certification to include 35. Upon completion of the work, the entire project installed thickness of the area covered and R-value of the installed thickness shall be listed on the certificate. The insulation installer shall sign, data and post the certificate in a conspicuous location on the job site per N1101.5 of the 2010 Resiential Code of New York State and submit an original signed copy for the Building Departments records
- 32. All work shall be guaranteed for one year after final payment. The general contractor is to furnish written guarantees on his work and all subcontractors work against defects resulting from the use of inferior materials, equipment, or workmanship as determined solely by the

- Architect. All such defects are to be replaced or repaired, complete with labor and materials, at no cost to owner.
- 33. Substitutions of equipment or materials other than those shown on the drawings or in the specifications shall be made only upon approval of the Architect or owner as noted on the drawings or in these specifications. The contractor shall submit his substitution for approval before releasing any order for fabrication and/or shipments. The Architect reserves the right to disapprove such substitution, provided in his sole opinion, the item offered is not equal or detailed on the drawings, which requires any redesign of the structure, partitions, Climate Zone 4A piping, redesign, and all new drawings and detailing required therefore shall, with the approval of the Architect, be prepared by the
- contractor at his own expense. 34. All work shall be installed so that all parts required are readily accessible for inspection, operation, maintenance and repair. Minor deviations from the drawings may be made to accomplish this, but changes of magnitude shall not be made without prior written approval from
- is to be completely cleaned and the site restored top plate at eaves. to existing condition, including but not limited to Certification
- a) Complete sweeping of all areas, and removal of all rubbish and debris, except that caused by the owner or others doing N.I.C. work.
- b) Removal of all labels from glass, fixtures, and Code. equipment, etc. and spray cleaning of glass c) Removal of stains, and paint from glass,

hardware, finished flooring, cabinets, etc.

- d) Final cleaning of all chrome and aluminum
- e) Restoration of property by returning shrubs to original locations, filling of all ruts and raked topsoil and repairs to damaged blacktop.
- 36. Finish materials and paint colors shall be reviewed and approved by the homeowner.
- 37. The Architect assumes no responsibility for the accuracy or correctness of any material or drawings prepared by others and provided to the

Energy Notes R-Values & U-Factors 2015 International Energy Conservation Code

| | Required | Proposed |
|---------------|----------|-------------|
| Ceiling | R-49 | R-38 & R-11 |
| Wall | R-20 | R-21 |
| Glazing | 0.40 | 0.32 |
| Floor | R-19 | R-30 |
| Design Criter | ia: | |
| 5750 Degree | Days | |
| | | |

R402.2.1 CEILINGS WITH ATTIC SPACES - Installing R-38 over 100% of the ceiling area requiring insulation shall be deemed to satisfy the requirement for R-49 insulation wherever the full height of uncompressed R-38 insulation extends over the wall

15% Maximum Glazing

I, Christina Griffin, Architect A.I.A., hereby states that I have prepared these plans and specifications to the best of my knowledge in compliance with all the requirements of the 2015 International Residential Code, and the 2015 International Energy Conservation

LIST OF DRAWINGS

- SITE PLAN, ZONING DATA, LOCATION MAP, COVERAGE CALCULATIONS
- A-1 BASEMENT PLAN & FIRST FLOOR PLAN
- A-2 SECOND FLOOR PLAN & SOUTH ELEVATION
- A-3 NORTH & EAST ELEVATION
- A-4 PHOTOS OF SITE & PHOTOS OF NEIGHBORING HOMES
- S-0 AS OF RIGHT SLOPE SITE PLAN SCHEME

HASTINGS GREEN BUILDING CODE COMPLIANCE NOTES

- 1. NEW EXTERIOR LIGHTS TO COMPLY WITH HGBC 160-8.H.1
- 2. NEW APPLIANCES TO COMPLY WITH HGBC 160.9.A.4
- 3. TOILET, SHOWERS & FAUCETS TO COMPLY WITH HGBC 160.10A, B & C
- 4. PAINTS, STAINS AND OTHER FINISHING MATERIALS TO COMPLY WITH HGBC 160.11.A.1,2,3,4,& 5

GENERAL STRUCTURAL NOTES

| 1. DESIGN LOADS: | LOCATION | LIVE LOAD | DEAD LOAD | TOTAL |
|---------------------|-----------------|---------------|-------------------|-------------|
| | 1ST FL | 40 | 15 | 55PSF |
| | 2ND FL | 40 | 15 | 55PSF |
| | ROOF | 40 | 15 | 55PSF |
| | DECK | 50 | 15 | 65PSF |
| 2. DESIGN STRESSES: | SOIL PRESSUR | E (assumed) | = 2 TONS (4 k | ips) PSF |
| | F'C = 3,500 PSI | (min. compre | ession strength o | of concrete |
| | F'S= 24,000 PSI | (tensile unit | stress of steel) | ASTM-A-36 |

- 6. INSTALL SOLID 2" THICK BLOCKING THE DEPTH OF FLOOR JOISTS . MAX. 8 FT. O.C
- 7. ALL MICROLAM AND PARALLAM BEAMS TO BE 2.0E PSL, AND ALL PARALLAM POSTS TO BE 1.8 E
- 8. ANY BEAMS BUILT UP 3 OR MORE, AND ALL LEDGER BOARDS, MUST BE FASTENED W/ $\frac{5}{8}$ " DIA. THROUGH BOLTAS 12" O.C. STAGGERED.
- 9. ALL RAFTERS SHALL BE FASTENED TO TOP OF PLATES AT EXTERIOR WALLS WITH GALVANIZED STEEL HURRICANE TIES.
- 10. ALL POINT LOADS TO TERMINATE AT SOLID BEARING.
- 11. PROJECT TO HAVE A PLACARD INDICATING THAT ENGINEERED LUMBER HAS BEEN USED IN THE CONSTRUCTION OF THE ADDITION, IN ACCORDANCE WITH NYSDOS REQUIREMENTS.

INSULATION AND FENESTRATION REQUIREMENT BY COMPONENT

| CLIMATE ZONE | FENESTRATION U-FACTOR ^b | SKYLIGHT _b U-FACTOR | GLAZED FENESTRATION SHGC ^{b,e} | CEILING R-VALUE | WOOD FRAME WALL R-VALUE |
|-----------------|---------------------------------------|-----------------------------------|---|--------------------------------------|------------------------------|
| 4A | 0.35 | 0.55 | 0.40 | 49* | 20 OR 13+5 ^h |
| | MASS WALL R-VALUE [†] | FLOOR R-VALUE | BASEMENT° WALL R-VALUE | SLAB ^d R-VALUE & DEPTH | CRAWL SPACE: WALL R-VALUE |
| | 8/13 | 19 | 10/13 | 10, 2FT | 10/13 |

- R-VALUE ARE MINIMUMS. U-FACTORS & SHGC ARE MAXIMUMS. WHEN INSULATION IS INSTALLED IN A CAVITY WHICH IS LESS THAN THE LABEL OR DESIGN THICKNESS OF THE INSULATION, THE INSTALLED
- R-VALUE OF THE INSULATION SHALL NOT BE LESS THAN THE R-VALUE SPECIFIED IN THE TABLE. THE FENESTRATION U-FACTORS COLUMN EXCLUDES SKYLIGHTS. THE SHGC COLUMN APPLIES TO ALL GLAZED FENESTRATION.
- "10/13" MEANS R-10 CONTINUOUS INSULATION ON THE INTERIOR OR EXTERIOR OF THE HOME OR R-13 CAVITY INSULATION AT THE INTERIOR OF THE BASEMENT WALL. R-5 SHALL BE ADD TO THE REQUIRED SLAB EDGE R-VALUES FOR HEATED SLABS. INSULATION DEPTH
- SHALL BE THE DEPTH OF THE FOOTING OR 2 FT, WHICHEVER IS LESS. THERE ARE NO SHGC REQUIREMENTS IN THE MARINE ZONE.

WIND DESIGN

- THE FIRST VALUE IS CAVITY INSULATION, THE SECOND VALUE IS CONTINUOUS INSULATION, SO "13+5" MEANS R-13 CAVITY INSULATION PLUS R-5 CONTINUOUS INSULATION
- THE SECOND R-VALUES APPLIES WHEN MORE THAN HALF THE INSULATION IS ON THE INTERIOR OF R402.2.1 CEILINGS WITH ATTIC SPACES - INSTALLING R-38 OVER 100% OF THE CEILING AREA
- REQUIRING INSULATION SHALL BE DEEMED TO SATISFY THE REQUIREMENT FOR R-49 INSULATION WHEREVER THE FULL HEIGHT OF UNCOMPRESSED R-38 INSULATION EXTENDS OVER THE WALL TOP PLATE AT EAVES. R402.2.2 CEILINGS WITHOUT ATTIC SPACES - WHERE DESIGN OF THE ROOF/CEILING ASSEMBLY DOES


NOT ALLOW SUFFICIENT SPACE FOR THE REQUIRED INSULATION, THE MINIMUM REQUIRED INSULATION FOR SUCH ROOF/CEILING ASSEMBLY SHALL BE R-30. THIS REDUCTION OF INSULATION FROM THE REQUIREMENT SHALL BE LIMITED TO 500 SQURE FEET OR 20% OF THE TOTAL INSULATED CEILING AREA, WHICHEVER IS LESS.

SUBJECT TO DAMAGE FROM

DESIGN REQUIREMENTS for the 2015 RESIDENTIAL CODE OF NEW YORK STATE CLIMATIC & GEOGRAPHIC DESIGN CRITERIA

| ROUND NOW OAD | SPEED (MPH) | EFFECTS | WIND | BORNE | SEISMIC DESIGN CATAGORY | WEATHER- ING | FROST LINE DEPTH | TERMITE | | ICE SHIELD UNDERLAY REQUIRED | | AIR FREEZING INDEX | MEAI ANNI TEMI |
|---------------------|--------------------|---------|------|-------|-------------------------------|-----------------|------------------------|-------------------------|---------|------------------------------------|-----|--------------------------|----------------------|
| 30 PSF | 115- 125 MPH | NO | YES | NO | С | SEVERE | 42" | MODERATE TO HEAVY | € 4A | YES | N/A | 2000 | 51. |

| | 07-10-19 | | |
|--------------------------|---------------------------------|--|--|
| DARD SUBMISSION 06-04-19 | ONING BOARD SUBMISSION 07-10-19 | | |

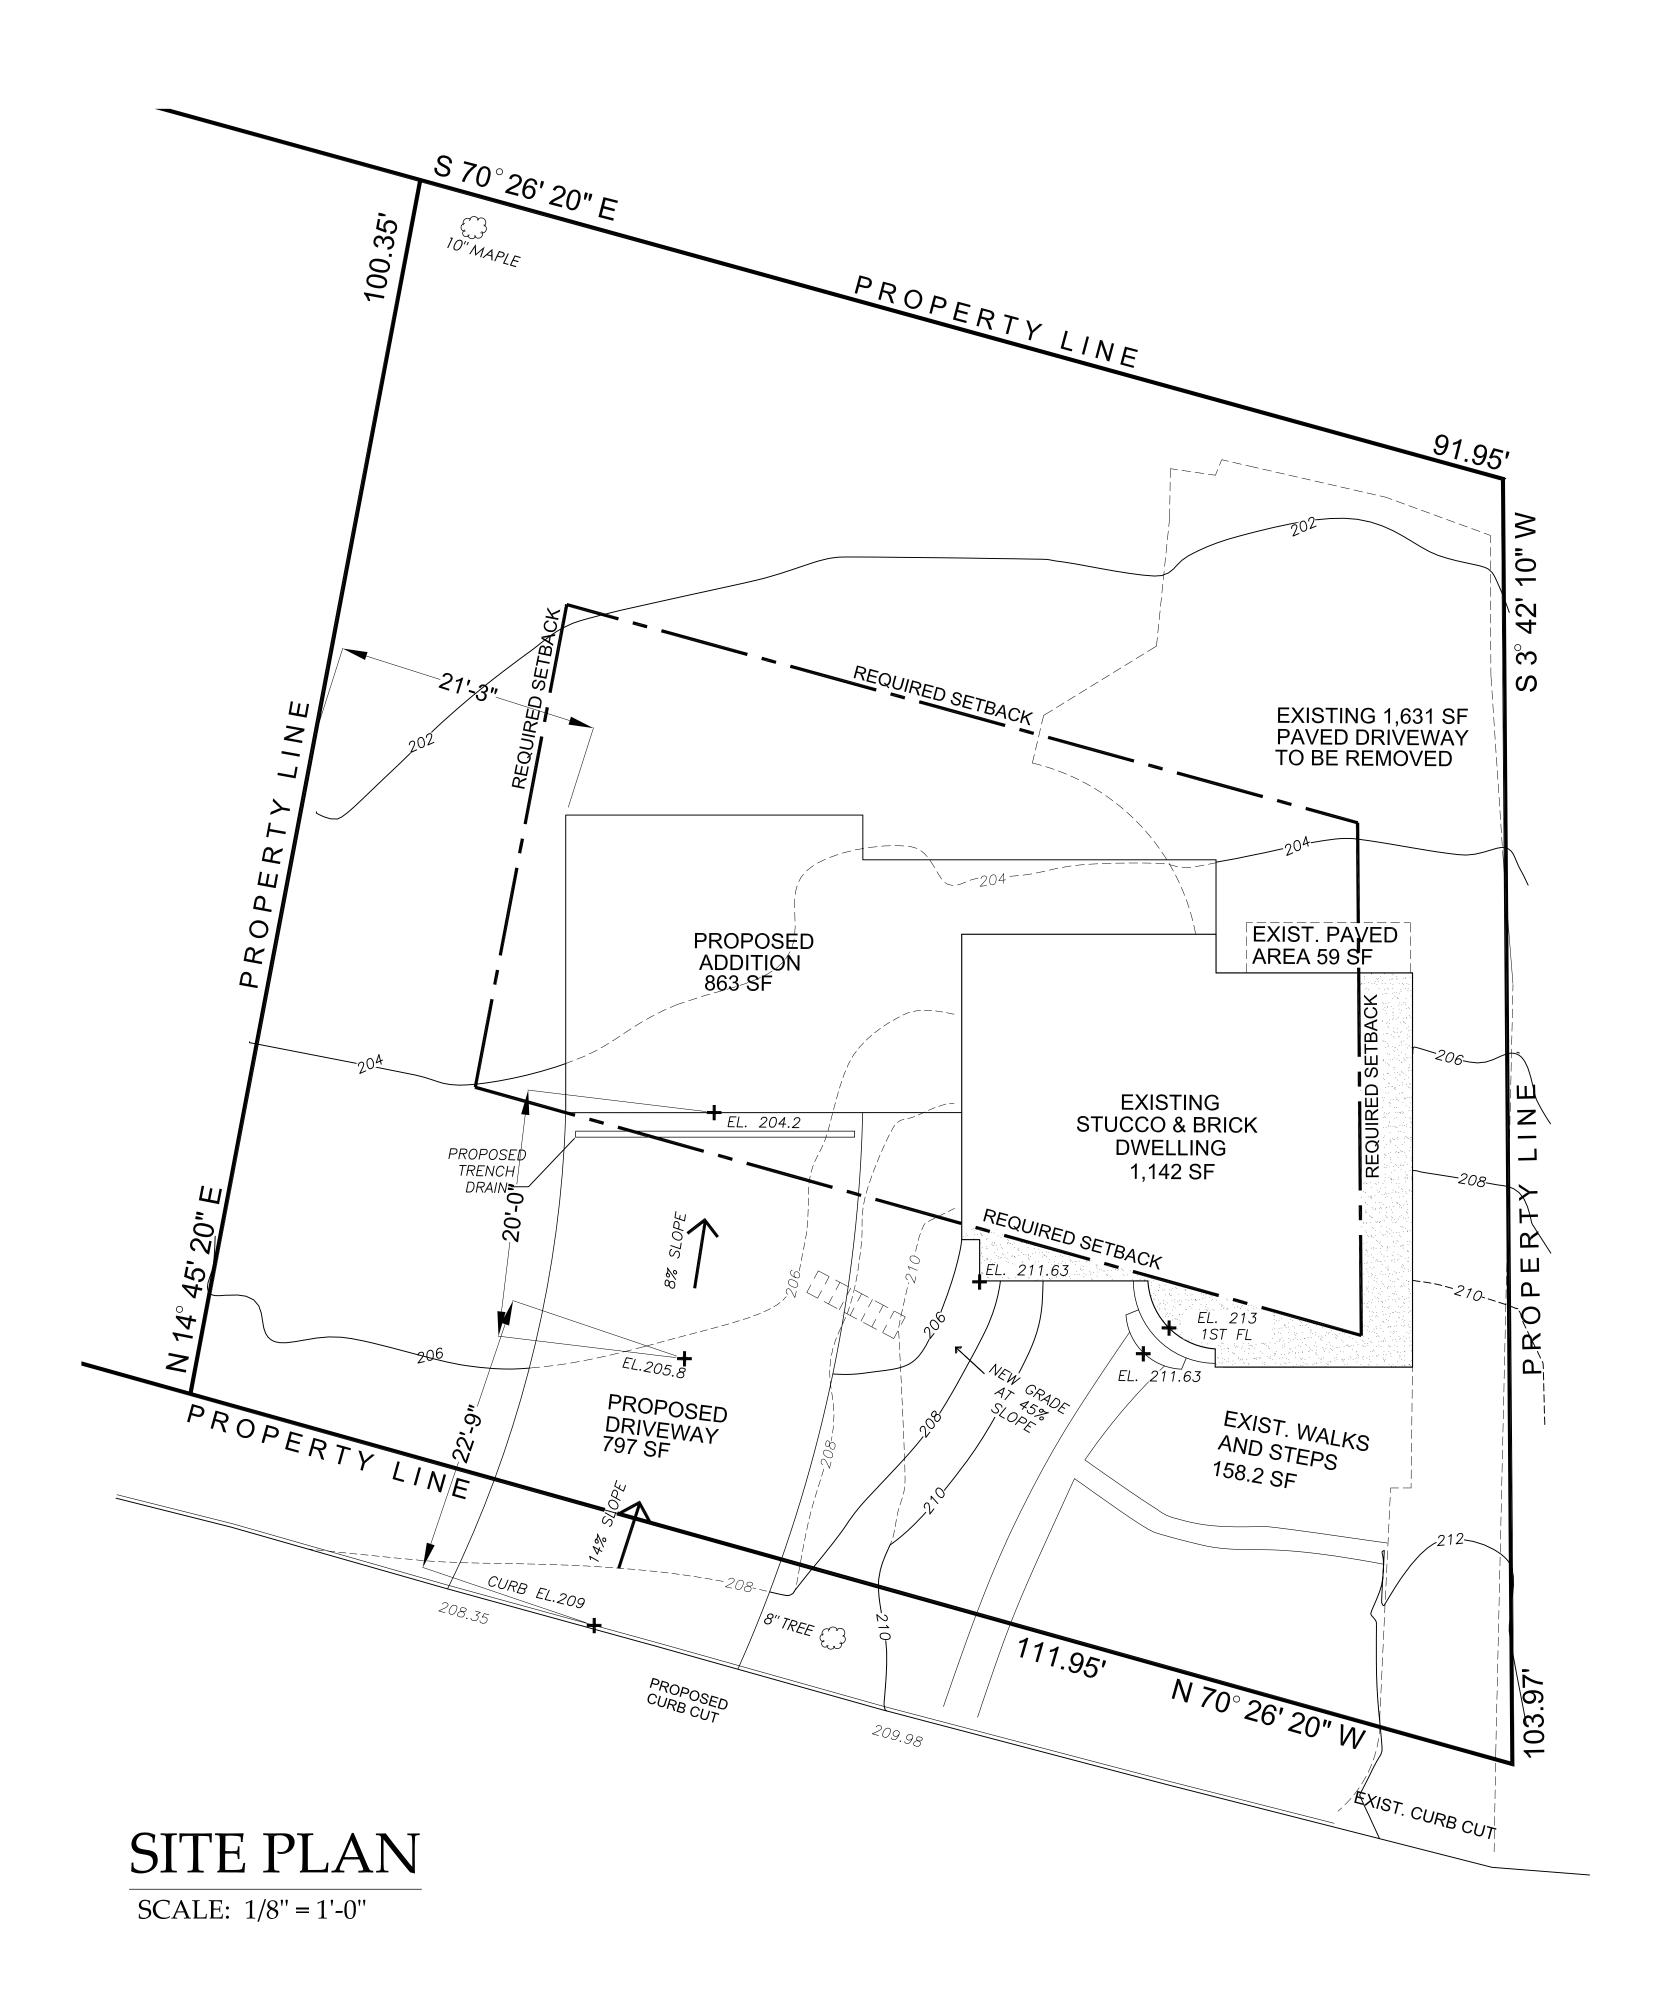

SITE PLAN LEGEND

ALTERATIONS & ADDITION TO TH

KOZICKY RESIDE

25 DEVON WAY HASTINGS-ON-HU

LOCATION MAP

LOT AREA 10,195 SF **EXISTING** PROPOSED 1,142 SF / 11% 2,005 SF / 19.79 BUILDING 217.2 SF 158.2 SF STEPS & WALKS DRIVEWAY (TOTAL) 797 SF 1,631 SF PROPOSED **EXISTING** TOTAL DEVELOPMENT COVERAGE (ALL BLDG., STRUCTURES, DRIVE-WAY, IMPERVIOUS SURFACES)

COVERAGE CALCULATIONS



TABLE OF ZONING DATA

25 DEVON WAY SECTION: 4.110 BLOCK: 99 LOT: 8

| | REQUIRED | EXISTING | PROPOSED |
|----------------------------|-------------------|---------------------|----------------------|
| MINIMUM LOT COVERAGE | 10,000 SF | 10,195 SF | 10,195 SF |
| WIDTH AT FRONT OF BUILDING | 100 FT | 111.95 FT | 111.95 FT |
| BUILDING COVERAGE | 25% | 11.3% (1,142 SF) | 19.7% (2,005 SF) |
| DEVELOPMENT COVERAGE | 35% | 29.4% (2,990.2 SF) | 29.1% (2,960.2 SF) |
| FRONT YARD SETBACK | 30 FT | 24.48 FT* | 24.48 FT* (EXISTING) |
| REAR YARD SETBACK | 30 FT | 40.14 FT | 11.91 FT* |
| SIDE ONE | 12 FT | 7.55 FT* | 7.55 FT* |
| SIDE TWO | 18 FT | 54.5 FT | 21.25 FT |
| SIDES TOTAL | 30 FT | 62.05 FT | 28.8 FT |
| MAXIMUM BUILDING HEIGHT | 2 ½ STORY / 35 FT | 2 ½ STORY / 32.7 FT | 2 ½ STORY / 32.7 FT |


OWNER: MARK & DIANA KOZICKY ZONING DISTRICT: R-10 PRESENTLY CONFORMING: NO <u>SECTION</u>: 4.110 <u>BLOCK</u>: 99 <u>LOT</u>: 8 SURVEYED BY: TC MERRITTS LAND SURVEYORS
SURVEY DATE: MAY 10, 2019
MUNICIPALITY: VILLAGE HASTINGS

* NON-CONFIRMING SETBACK


S-2

CHRISTINA GRIFFIN ARCHITECT PC

10 Spring Street
Hastings-on-Hudson, New York 10706
914.478.0799 tel 914.478.0806 fax

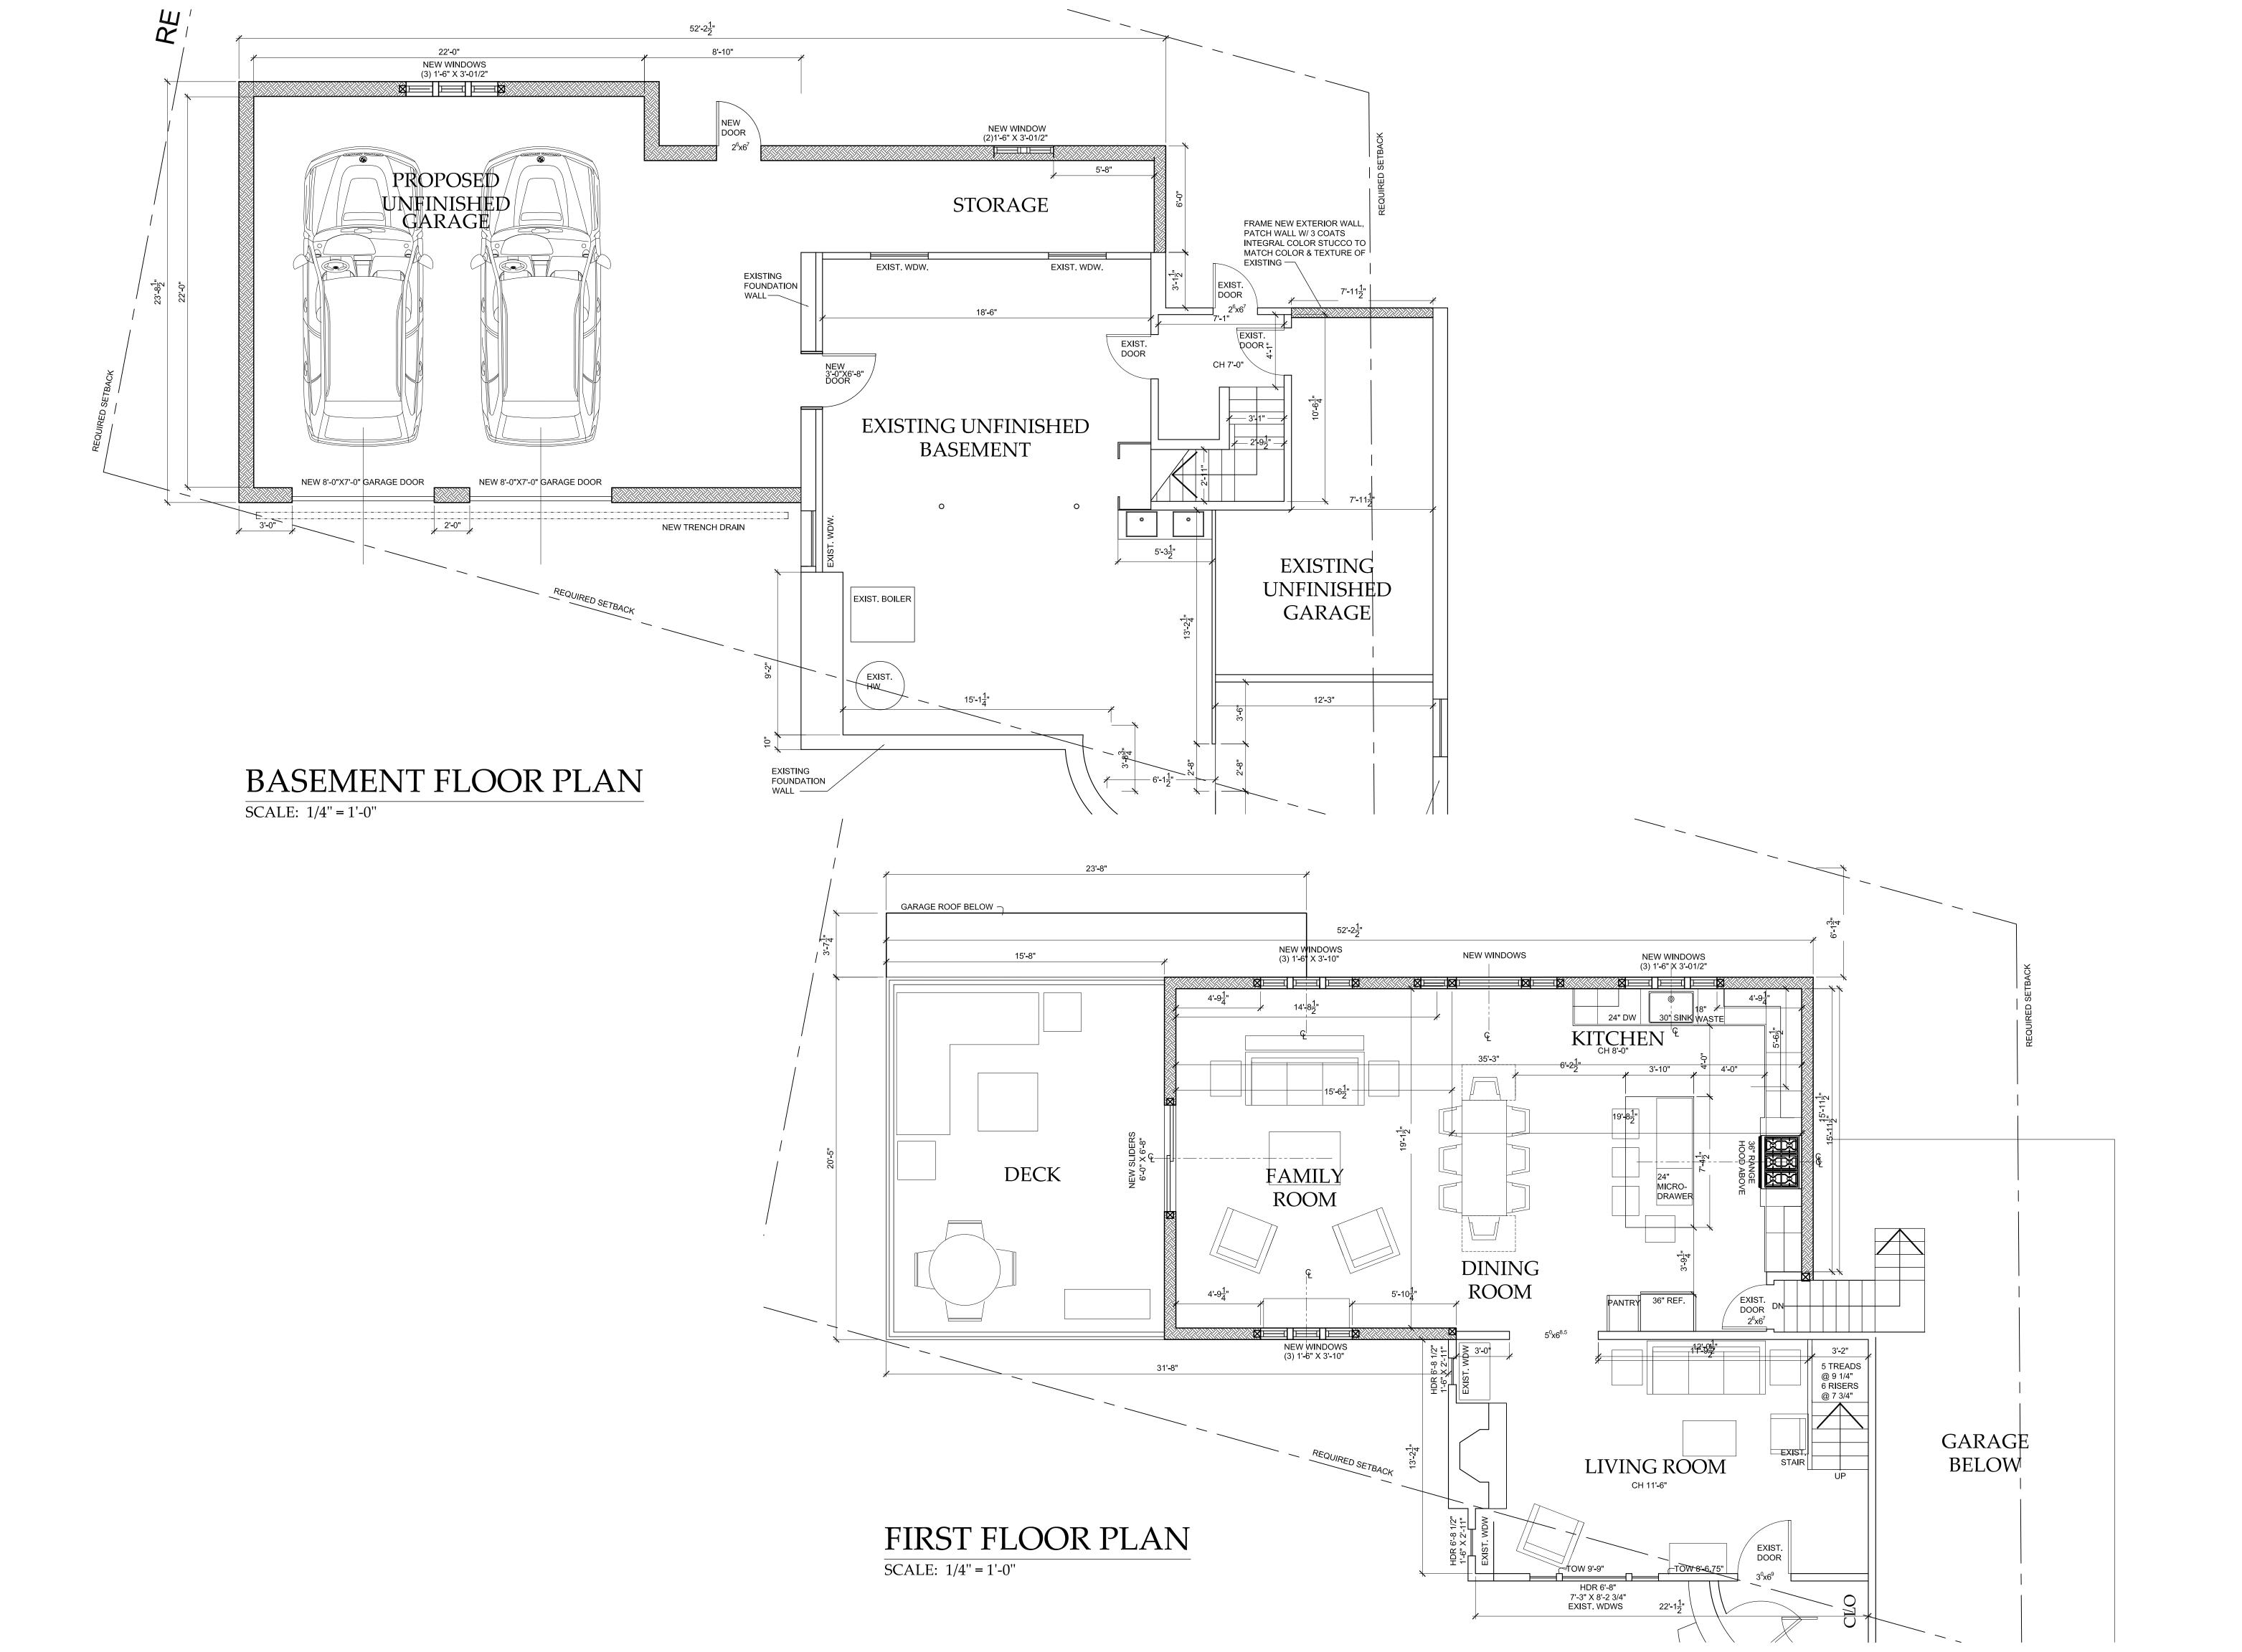

A-1

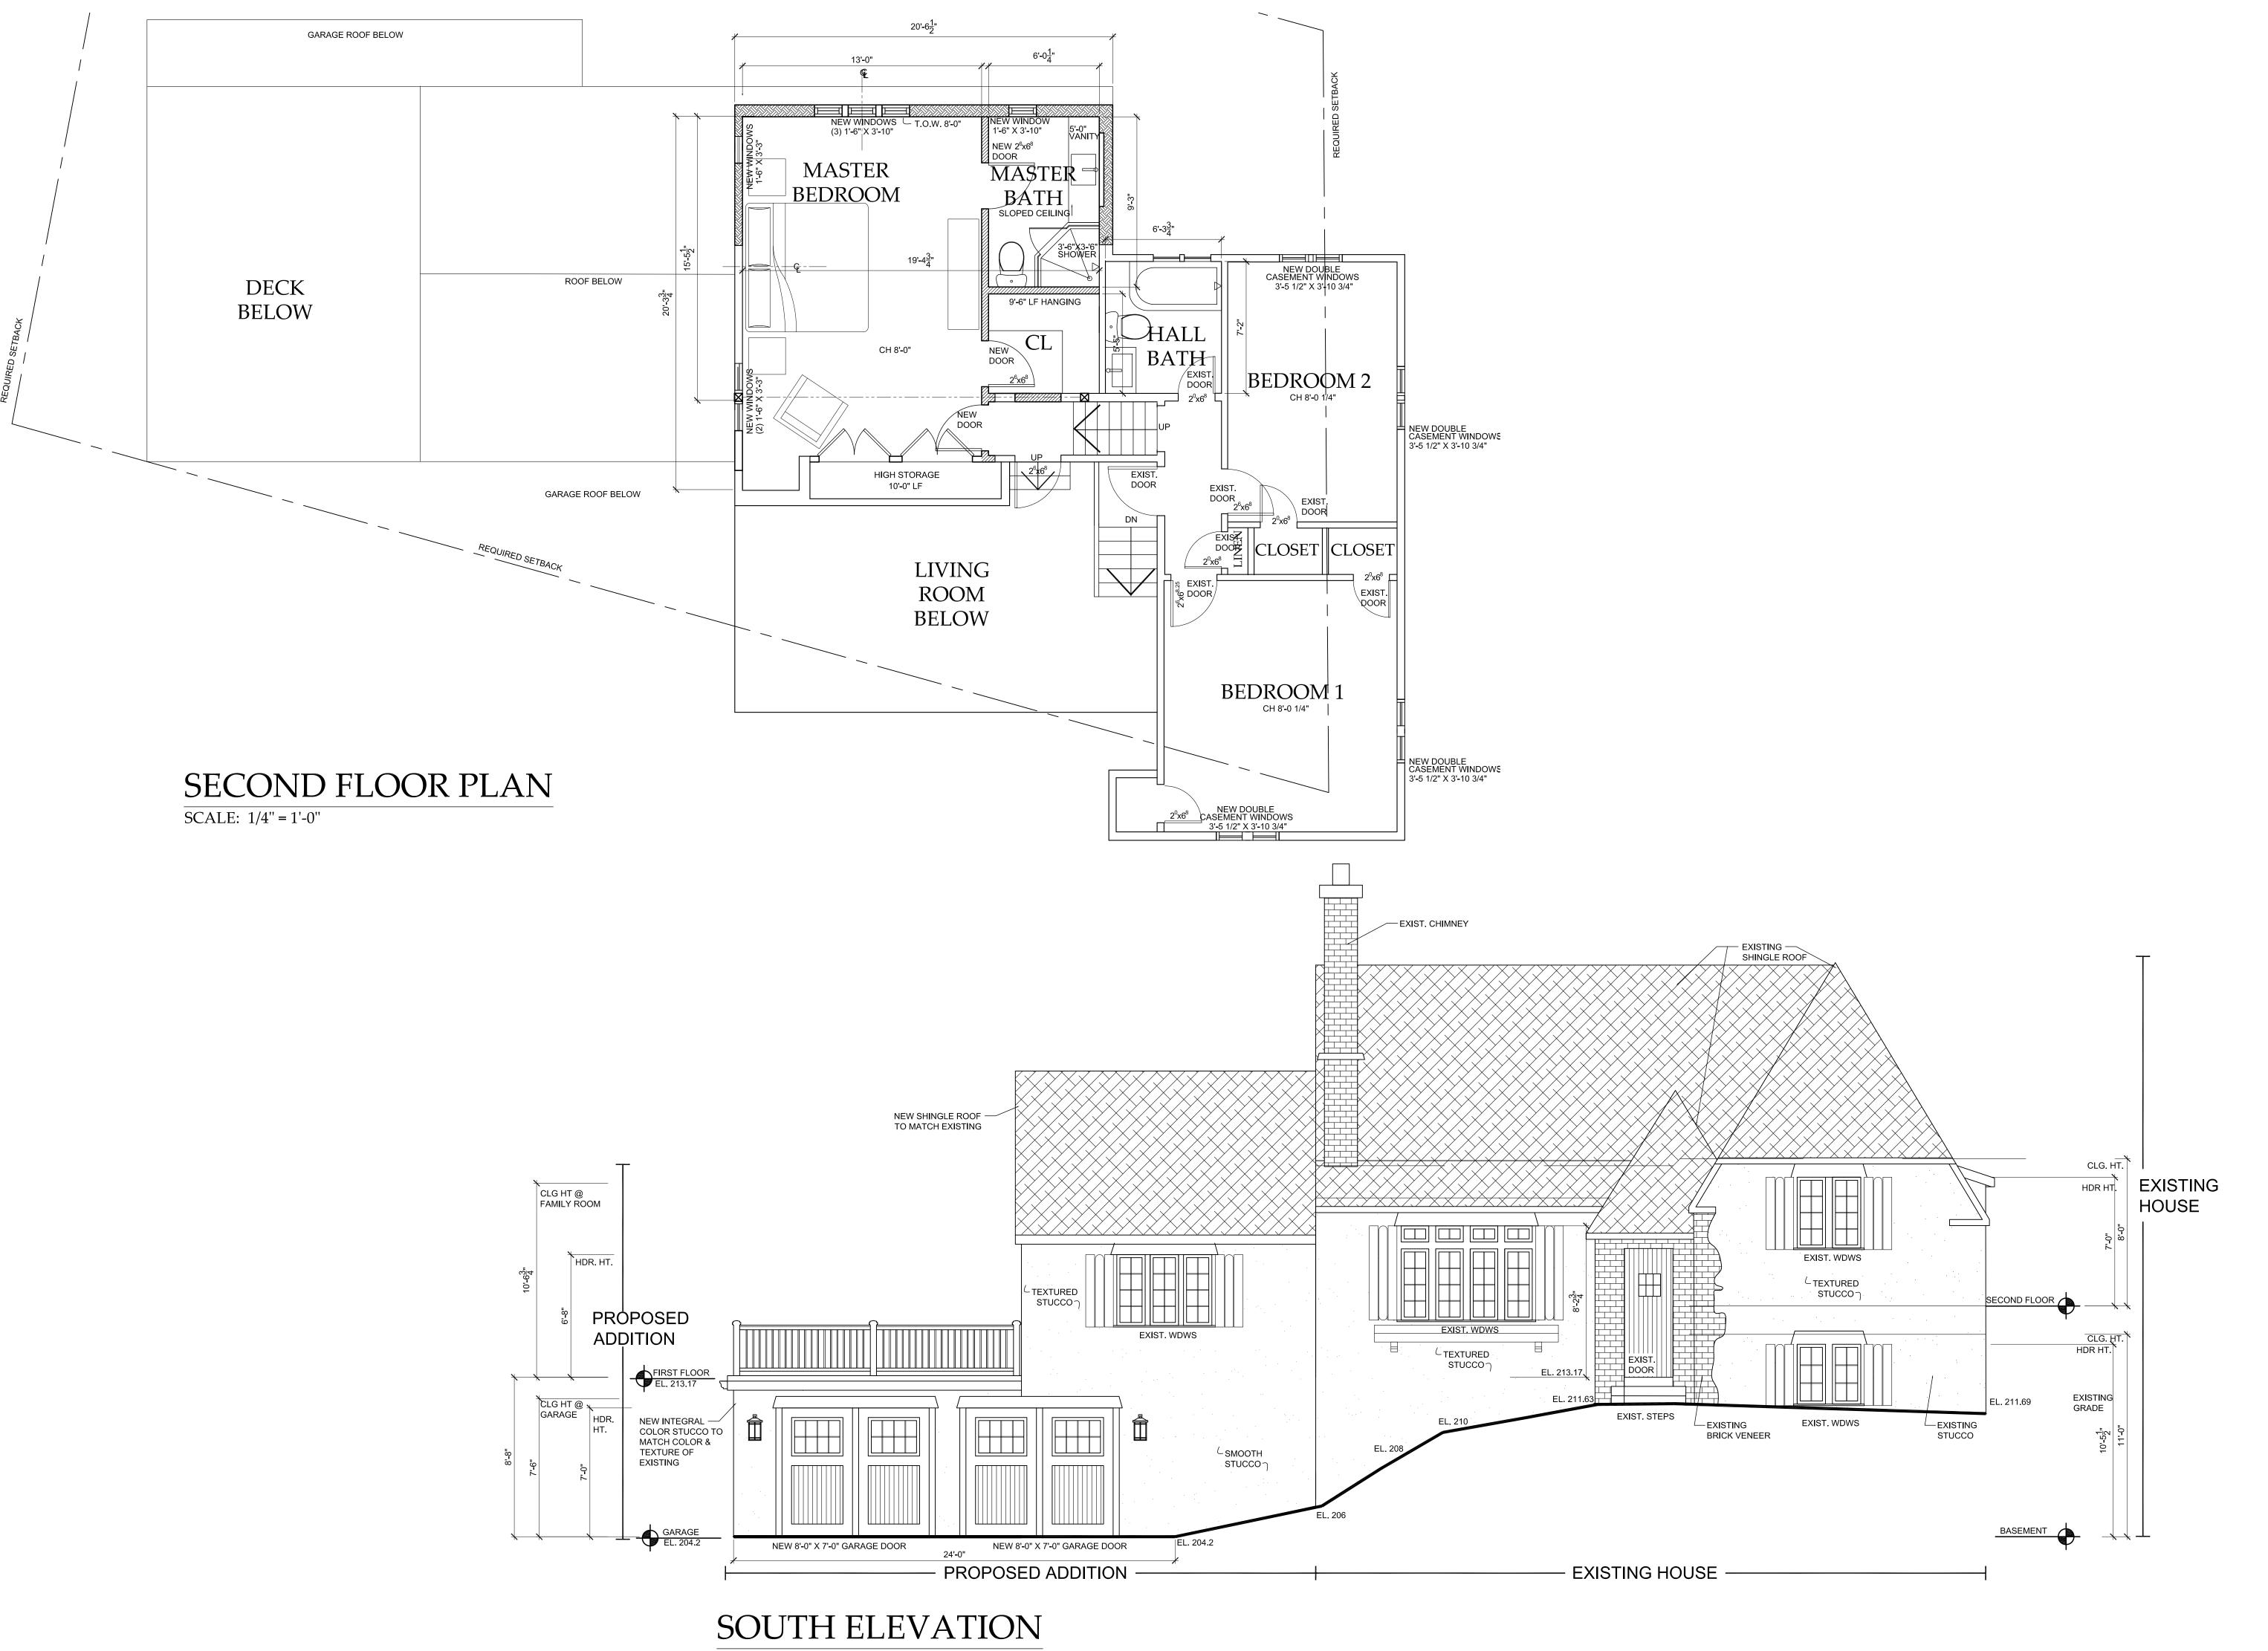


SCALE: 1/4" = 1'-0"

ALTERATIONS

Drawing Title

2ND FL PLAN
ELEVATION

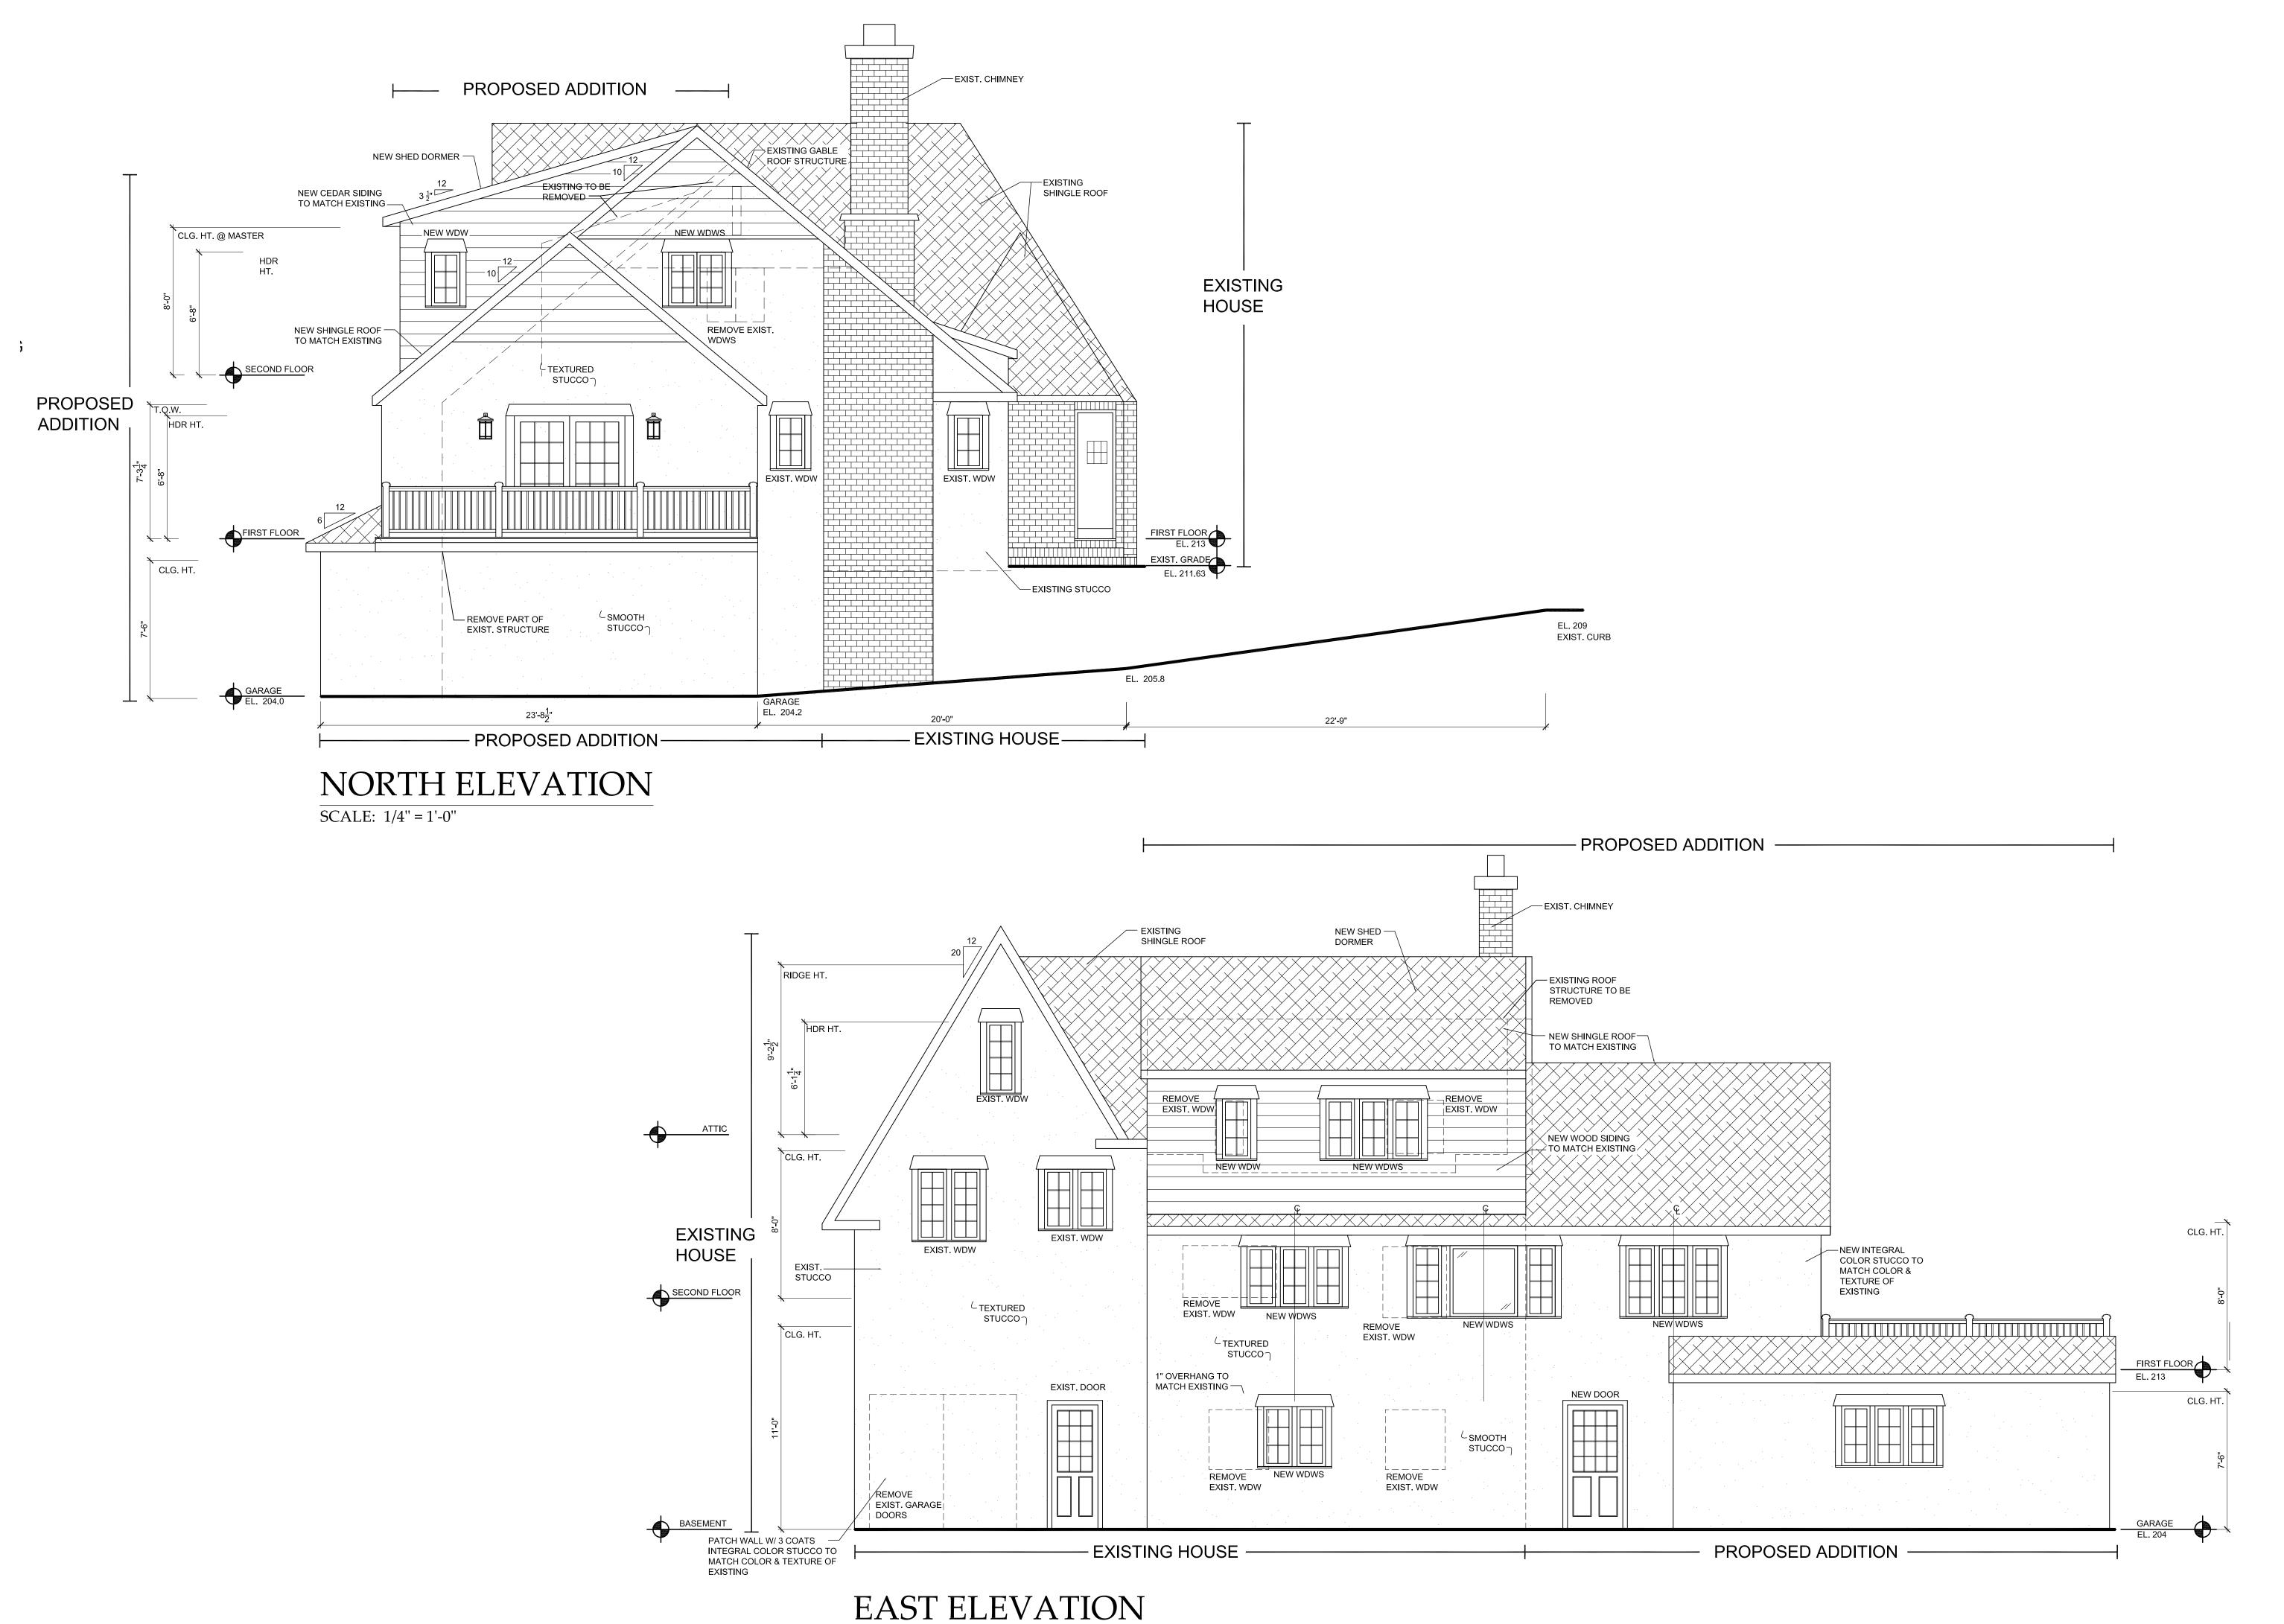

SCALE: 1/4" = 1'-0"

ALTERATIONS & ADDITION TO THE

KOZICKY RESIDENCE

25 DEVON WAY HASTINGS-ON-HUDSON,NY 10706

Deate

ELEVATIONS

ELEVATIONS

REVISED ZONING BOARD SUBMISSION 06-04-19
REVISED ZONING BOARD SUBMISSION 07-10-19

REVISED ZONING BOARD SUBMISSION 07-10-19

REVISED ZONING BOARD SUBMISSION 07-10-19

10 Spring Street
Hastings-on-Hudson, New York 10706
914.478.0799 tel 914.478.0806 fax
www.christinagriffinarchitect.com

A-3














EXISTING HOUSE AT 25 DEVON WAY

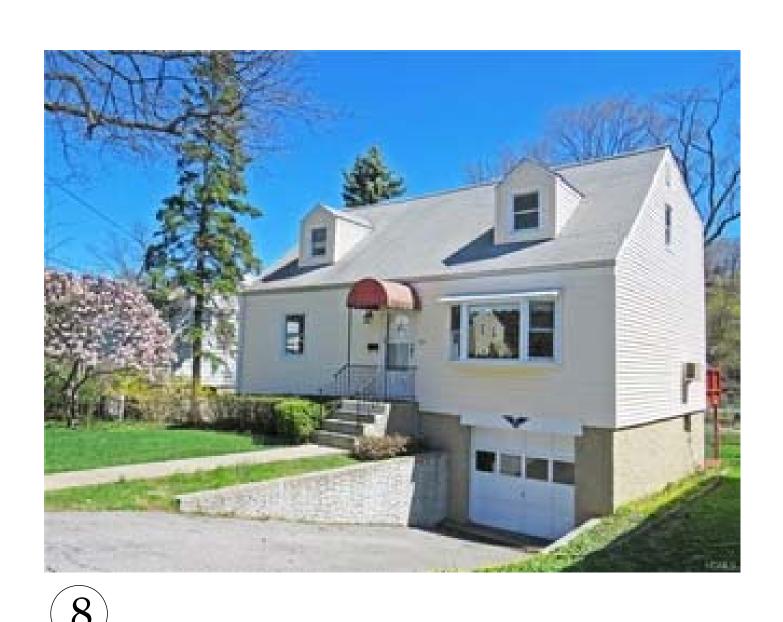













NEIGHBORING PROPERTIES on DEVON WAY

AS OF RIGHT DRIVEWAY SLOPE CAUSES THE FOLLOWING PROBLEMS:

- 1. BUILDING COVERAGE IN EXCESS OF 25%
- 2. DEVELOPMENT COVERAGE IN EXCESS OF 35%
- 3. ENCROACHMENT ON REAR YARD SETBACK
- 4. ENCROACHMENT ON SIDE YARD SETBACK

PROPOSED CONTINUATION OF NON-CONFORMITY

COVERAGE CALCULATIONS

LOCATION MAP

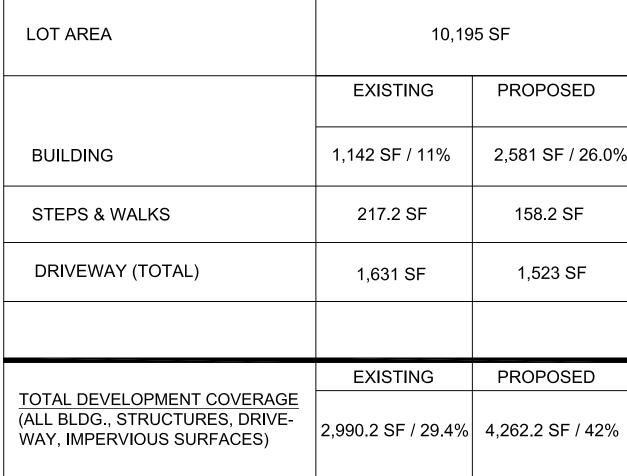




TABLE OF ZONING DATA

25 DEVON WAY SECTION: 4.110 BLOCK: 99 LOT: 8

| | T | T | |
|----------------------------|-------------------|---------------------|----------------------|
| | REQUIRED | EXISTING | PROPOSED |
| MINIMUM LOT COVERAGE | 10,000 SF | 10,195 SF | 10,195 SF |
| WIDTH AT FRONT OF BUILDING | 100 FT | 111.95 FT | 111.95 FT |
| BUILDING COVERAGE | 25% | 11.3% (1,142 SF) | 26% (2,581 SF)* |
| DEVELOPMENT COVERAGE | 35% | 29.4% (2,990.2 SF) | 42.0% (4,262.2 SF)* |
| FRONT YARD SETBACK | 30 FT | 24.48 FT* | 24.48 FT* (EXISTING) |
| REAR YARD SETBACK | 30 FT | 40.14 FT | 11.91 FT* |
| SIDE ONE | 12 FT | 7.55 FT* | 7.55 FT* |
| SIDE TWO | 18 FT | 54.5 FT | 15.5 FT |
| SIDES TOTAL | 30 FT | 62.05 FT | 23.05 FT |
| MAXIMUM BUILDING HEIGHT | 2 ½ STORY / 35 FT | 2 ½ STORY / 32.7 FT | 2 ½ STORY / 32.7 FT |
| | | | |

OWNER: MARK & DIANA KOZICKY ZONING DISTRICT: R-10 PRESENTLY CONFORMING: NO

* NON-CONFIRMING SETBACK

<u>SECTION</u>: 4.110 BLOCK: 99 LOT: 8

SURVEYED BY: TC MERRITTS LAND SURVEYORS SURVEY DATE: MAY 10, 2019

MUNICIPALITY: VILLAGE HASTINGS